


ANILLAS


ANILLAS SIMPLES

| Ref. | WLL t | \varnothing d mm | b mm | t mm | Peso kg |
|-------|----------|-----------------------|---------|---------|------------|
| ASE13 | 2,0 | 13 | 60 | 110 | 0,35 |
| ASE16 | 2,5 | 16 | 60 | 110 | 0,6 |
| ASE18 | 4,0 | 18 | 75 | 135 | 0,9 |
| ASE22 | 6,7 | 22 | 90 | 160 | 1,5 |
| ASE26 | 10,0 | 26 | 100 | 180 | 2,35 |
| ASE32 | 14,0 | 32 | 110 | 200 | 3,85 |
| ASE36 | 19,0 | 36 | 140 | 260 | 6,2 |
| ASE45 | 26,5 | 45 | 180 | 340 | 13,0 |
| ASE56 | 37,0 | 56 | 200 | 400 | 23,54 |

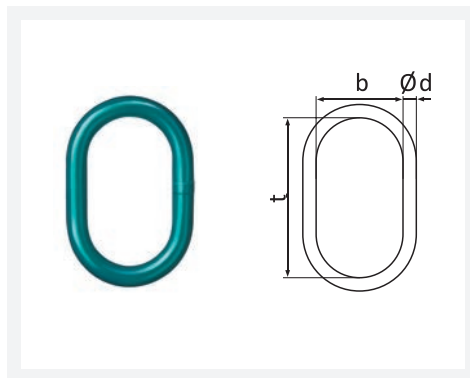


ANILLAS TRIPLES

| Ref. | WLL | | \varnothing d mm | b mm | t mm | Peso kg |
|-------|---------|----------|-----------------------|---------|---------|------------|
| | 0 - 45° | 45 - 60° | | | | |
| ATE06 | 3,0 | 2,12 | 18/13 | 75/25 | 135/54 | 1,35 |
| ATE08 | 5,3 | 3,75 | 22/16 | 90/34 | 160/70 | 2,40 |
| ATE10 | 8,4 | 6,0 | 26/18 | 100/40 | 180/85 | 3,65 |
| ATE13 | 14,0 | 10,0 | 32/22 | 110/50 | 200/115 | 6,25 |
| ATE16 | 21,2 | 15,0 | 36/26 | 140/65 | 260/140 | 10,0 |
| ATE18 | 26,5 | 19,0 | 45/32 | 180/70 | 340/150 | 18,95 |
| ATE22 | 40,0 | 28,0 | 50/36 | 190/75 | 350/170 | 23,4 |
| ATE26 | 56,0 | 40,0 | 63/45 | 220/90 | 430/180 | 47,0 |

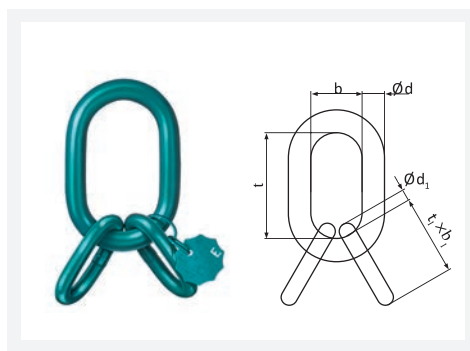


ANILLAS PARA GANCHO DE GRÚA Nº 16 (DIN 15.401)

| Ref. | WLL | | \varnothing d mm | a mm | b mm | t mm | Peso kg |
|-----------|---------|----------|-----------------------|---------|---------|---------|------------|
| | 0 - 45° | 45 - 60° | | | | | |
| ATEN16-06 | 3,0 | 2,12 | 22 | 260 | 140 | 360 | 3,5 |
| ATEN16-08 | 5,3 | 3,75 | 26 | 260 | 140 | 386 | 5,3 |
| ATEN16-10 | 8,4 | 6,0 | 30 | 260 | 140 | 396 | 7,2 |
| ATEN16-13 | 14,0 | 10,0 | 34 | 260 | 140 | 438 | 11,2 |

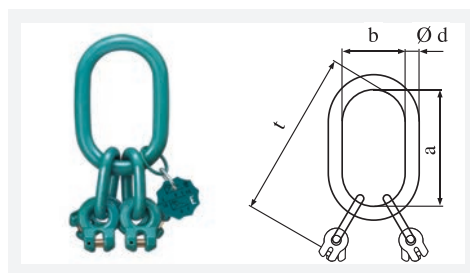


ANILLAS PARA GANCHO DE GRÚA Nº 25 (DIN 15.401)

| Ref. | WLL | | \varnothing d mm | a mm | b mm | t mm | Peso kg |
|-----------|---------|----------|-----------------------|---------|---------|---------|------------|
| | 0 - 45° | 45 - 60° | | | | | |
| ATEN25-06 | 3,0 | 2,12 | 24 | 340 | 180 | 440 | 4,4 |
| ATEN25-08 | 5,3 | 3,75 | 28 | 340 | 180 | 466 | 7,1 |
| ATEN25-10 | 8,4 | 6,0 | 32 | 340 | 180 | 476 | 9,0 |
| ATEN25-13 | 14,0 | 10,0 | 38 | 340 | 180 | 518 | 14,3 |
| ATEN25-16 | 21,2 | 15,0 | 42 | 340 | 180 | 558 | 21,2 |

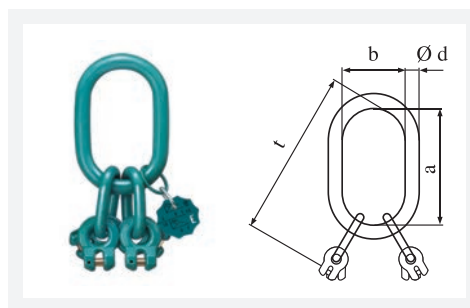

ANILLAS PARA GANCHO DE GRÚA Nº 40 (DIN 15.401)

| Ref. | WLL | | Ø d mm | a mm | b mm | t mm | Peso kg |
|-----------|---------|----------|-----------|---------|---------|---------|------------|
| | 0 - 45° | 45 - 60° | | | | | |
| ATEN40-06 | 3,0 | 2,12 | 26 | 430 | 220 | 530 | 6,2 |
| ATEN40-08 | 5,3 | 3,75 | 30 | 430 | 220 | 556 | 8,7 |
| ATEN40-10 | 8,4 | 6,0 | 34 | 430 | 220 | 596 | 12,5 |
| ATEN40-13 | 14,0 | 10,0 | 40 | 430 | 220 | 633 | 19,0 |
| ATEN40-16 | 21,2 | 15,0 | 42 | 430 | 220 | 648 | 24,0 |
| ATEN40-18 | 26,5 | 19,0 | 48 | 430 | 220 | 669 | 33,0 |
| ATEN40-22 | 40,0 | 28,0 | 54 | 430 | 220 | 704 | 46,0 |

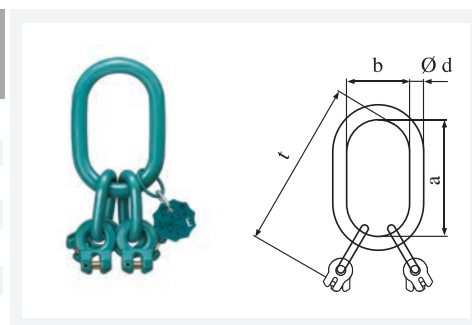

DIN 15.401